



Versatile consumables

Various marking media and sizes

- φ2.5~φ6.5mm PVC tubes
- φ2.5~φ6.5mm Heat Shrinkable tubes




- 5mm / 9mm / 12mm wide MAX genuine tapes



Large internal memory storage

Number of files	50
Maximum Characters/file	1,225
Internal memory	61,250 characters(1,225 characters x 50 files)
Registration of word	Up to 30 words

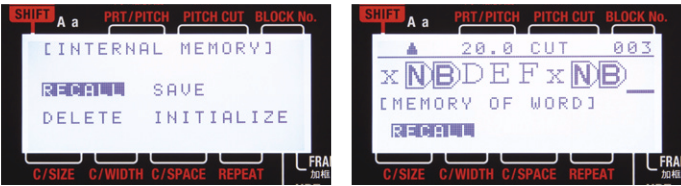

SPECIFICATION

ITEMS	CONTENTS
Dimensions	295 (W)×293 (D)×94 (H) mm
Weight	2.1kg
Printing method	Thermal transfer method (300dpi)
Display	LCD dot matrix : 64×160 Pixel (Backlit)
Printing speed	27.5mm/s (Standard) 10.0mm/s (Low temperature mode)
Maximum Printing length	Tube : 20m, Tape : 5m Tube : 100m, Tape : 7m (Multiple copies)
Maximum number of characters to input	1,225 characters per file
Character size	1.3, 2, 3, 4, 6mm height
Usable tube	φ2.5 to 6.5mm (PVC tube, Shrinkable tube)
Usable tape	Width 5, 9, 12mm (Max genuine tape)
Tube cutting method	Auto half cut, manual full cut
Internal memory	61,250 characters (1,225 characters × 50 files)
Power supply	DC12V, 3.0A *Use only specified AC Adapter (100V - 240V) included in the package.
Power consumption	15W (max.)
Operating environment	15 to 35°C



Wide range of setting options



Set the most appropriate mode for your desired printing environment!

- PRINTING DENSITY
- FEED THE HEAD OF TUBE
- POSITION OF PRINTING LINE
- AUTO POWER-OFF
- DEFAULT VALUE OF REPEAT
- PRINTING STYLE OF RPT & SEQ
- LCD BACK LIGHT
- LOW TEM.MODE
- 6.9 MARK
- CUTTING POSITION
- DEFAULT VALUE OF PITCH LENGTH
- JUSTIFICATION
- LCD BRIGHTNESS

The pitch can be set up to maximum 60mm.

Marking on tape : 4 up to 60mm

Marking on tube : 10 up to 60mm * (Auto pitch function is available for more than 60mm)



CONSUMABLES

INK RIBBON CASE LM-RC500	20PCS./CTN	UL RECOGNIZED TUBE 1ROLL/BOX LM-TU332N2 WHITE φ3.2mm×100m/ROLL LM-TU336N2 WHITE φ3.6mm×100m/ROLL LM-TU342N2 WHITE φ4.2mm× 80m/ROLL LM-TU352N2 WHITE φ5.2mm× 80m/ROLL
ECONOMICAL INK RIBBON REFILLS 10 ROLLS/BOX LM-IR50B (BLACK) 110m/ROLL		MAX HIGH QUALITY TUBE 1ROLL/BOX LM-TU432L WHITE φ3.2mm×200m/ROLL LM-TU436L WHITE φ3.6mm×200m/ROLL LM-TU442L WHITE φ4.2mm×200m/ROLL LM-TU452L WHITE φ5.2mm×135m/ROLL LM-TU464L WHITE φ6.4mm×100m/ROLL LM-TU480L WHITE φ8.0mm× 70m/ROLL
INK RIBBON REFILLS FOR HEAT SHRINKABLE TUBE 10 ROLLS/BOX LM-IR50BP (BLACK) 110m/ROLL LM-IR50W (WHITE) 70m/ROLL		

TAPE CASSETTE 10PCS./BOX	
LM-TP505W (WHITE)	5mm(W)×16m(L)/PC
LM-TP505Y (YELLOW)	5mm(W)× 8m(L)/PC
LM-TP505T (TRANSPARENT)	5mm(W)× 8m(L)/PC
LM-TP509W (WHITE)	9mm(W)×16m(L)/PC
LM-TP509Y (YELLOW)	9mm(W)× 8m(L)/PC
LM-TP509T (TRANSPARENT)	9mm(W)× 8m(L)/PC
LM-TP512W (WHITE)	12mm(W)×16m(L)/PC
LM-TP512Y (YELLOW)	12mm(W)× 8m(L)/PC

HALF CUTTER UNIT LM-HC340



Marking Tubes and Labels!

Electronic Lettering Machine


LETATWIN LM-550E

Professional choice for your cable marking job!

Decreased Ink Ribbon exchanges



110m/roll

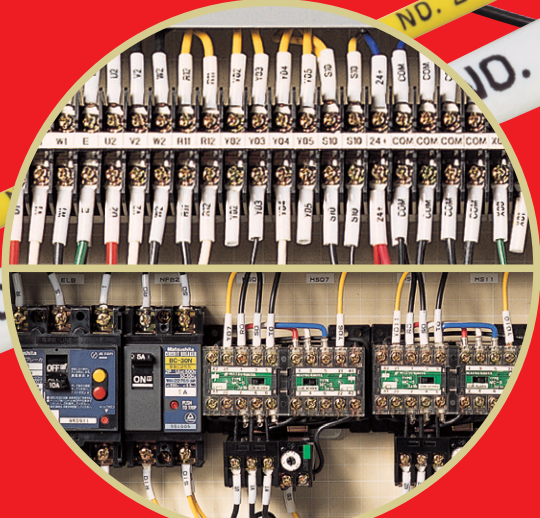

MAX CO.,LTD.
6-6,NIHONBASHI,HAKOZAKI-CHO,CHUO-KU,TOKYO,JAPAN
PHONE:81-3-3669-8131 FAX:81-3-3669-7104
Web:http://www.max-ltd.co.jp/int/

Distributor:

Improved functions

Longer Consumables

Ink ribbon increased from 50m/roll to 110m/roll!
Decreased ribbon exchanges lets you focus on other work!

LM-380ZE ink ribbon



LM-550E ink ribbon



LM-IR300B ink ribbon for LM-380ZE

50 meters

LM-IR500B ink ribbon for LM-550E

110 meters

LM-TP3xxx tape for LM-380ZE

8 meters

LM-TP5xxW (White) for LM-550E

16 meters

*LM-TP5xxT (Transparent) and TP5xxY (Yellow) remain as 8meters.

Increased limit for REPEAT function, 300 times per block!

Increased from 100 times to 300 times. You can decrease your data input time!

LM-550E LM-550E LM-550E LM-550E

▲ REPEAT function tube print example



LM-380ZE




LM-550E

Increased printing speed!!

(35 pcs/min → 37 pcs/min, 1pc = 20mm pitch with half-cut)

Printing speed increased from 25mm/sec to 27.5mm/sec.


LM-380ZE



1pc = 20mm pitch with half-cut

35pcs/min printing speed 25mm/s

LM-550E




1pc = 20mm pitch with half-cut

37pcs/min printing speed 27.5mm/s

Addition of 'SUPER' AUTO SIZE function, makes it more useful!

In addition to 'Auto' and 'Off', you can choose 'SUPER' AUTO SIZE function. 'SUPER' can make the length of printed words shorter than normal AUTO SIZE.

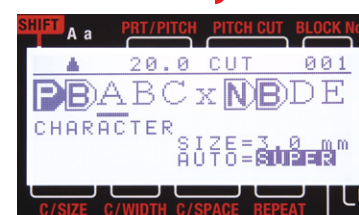

Useful functions

Economical refill-type ink ribbon.

Reusable ribbon cassette means no wasted cassettes!




+




Versatile sequence settings.


START/END




8 SCALE/10 SCALE/16 SCALE setting

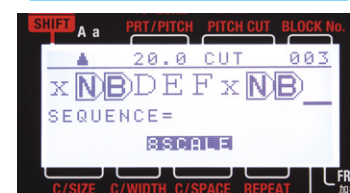

ALPHABET A-Z, a-z setting

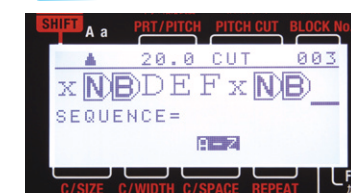

ALL/ODD ONLY/EVEN ONLY setting



8 SCALE/10 SCALE/16 SCALE setting




ALPHABET A-Z, a-z setting



FEED THE HEAD OF TUBE function.

Tube lengthwise margin settings can decrease consumable wastage.



YES : approx. 5.7cm




NO : approx. 1.7cm



*The above length value refers to only MAX genuine tube and ribbon. For local tubes with many twists/bends, 'YES' setting is recommended.

Useful numeric keypad.

Easy for inputting numbers!

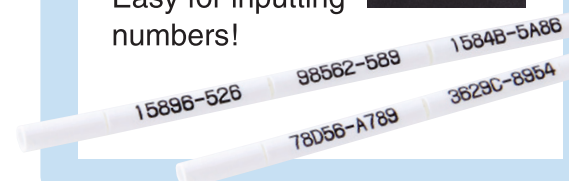

Useful Preview function.

By checking printing contents, you can decrease consumable loss.

DEFx01 DEFx02 DEFx03 DEFx

